




INTERIOR WALL	SCALE: 3" = 1'-0"	5
INTERIOR WALL W/ 6" INSULATION	SCALE: 3" = 1'-0"	5A
INTERIOR WALL W/ 6" INSULATION, GWB ONE SIDE	SCALE: 3" = 1'-0"	5B

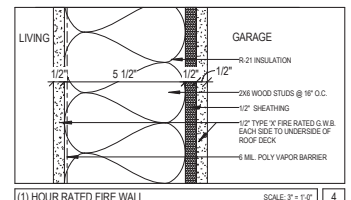

(1) HOUR RATED FIRE WALL	SCALE: 3" = 1'-0"	4
--------------------------	-------------------	---

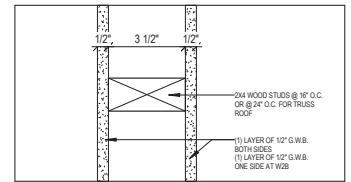

INTERIOR WALL	SCALE: 3" = 1'-0"	2
INTERIOR WALL W/ 4" INSULATION	SCALE: 3" = 1'-0"	2A
INTERIOR WALL W/ 4" INSULATION, GWB ONE SIDE	SCALE: 3" = 1'-0"	2B

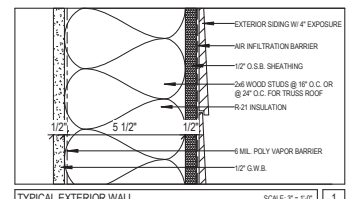

TYPICAL EXTERIOR WALL	SCALE: 3" = 1'-0"	1
-----------------------	-------------------	---

**REVISIONS**

#	DATE	DESCRIPTION
1	05.10.16	PLAN REVIEW
2	06.10.16	PLAN REVIEW
3	07.08.16	CONSTRUCTION DOCUMENTS

DATE:	07.08.16
PROJECT #	070703.176
DRAWN BY:	EJR
CHECKED BY:	RLD
DRAWING SCALE	As indicated

**SHEET TITLE**

FIRST FLOOR PLAN /  
 WALL TYPES

**SHEAR WALLS**  
 SW (SHEAR WALL) INDICATES:  
 2x6 @ 24" OR 16" O.C. (SEE PLAN) WALL w/ 2x6  
 SOLID BLOCKING AT ALL SHEATHING PANEL  
 EDGES. FASTEN 1/2" THICK APA RATED  
 SHEATHING TO ONE SIDE OF THE WALL w/ 10d  
 NAILS @ 4" O.C. AT PANEL EDGES AND 6" O.C.  
 INTERMEDIATE, TYP. FASTEN BOTTOM PLATE TO  
 FLOOR FRAMING w/ (2) 16d NAILS @ 6" O.C., TYP.

**NOTES:**  
 1. GENERAL CONTRACTOR TO COORDINATE ALL UTILITIES.  
 2. DO NOT VENT BATHROOMS AND LAUNDRY EQUIPMENT  
 THROUGH EAVES.